EUROGRAFT

Eurocraft Industries inc | All rights reseved © Copyright 2022



About Us

Our desire to build the best windows and doors in our industry has been core value of our business. It has led us to pioneer new products designs to meet a variety of styles and preferences. That's why we continue to be welcomed in new homes, becoming part of our client's life.

We are committed to adding values to our clients, and we understand that your home is a reflection of who you are and your unique expression

That's why all our windows and doors profiles it features superior thermal performance with an exquisite, clean design, comfort and security with luxurious external finishes regardless of room type, purpose or furnishings.



Table Of Content

O7 · 18 Windows

Products pages

35 · 36

Mullion Window Aluminun 19 · 28 Doors Products

pages

37 · 38 Standard Finishes **29 · 34** Architectural Shapes Available

39 · 46

Our Facilities

Our WINDOWS Products



Serie EC 100

Beautiful, often used as accent windows is a fixed, rectangular/square window made of thick-walled extruded aluminun frames and impact resistant glass providing you with security, durability, and strenght. Fills the room with a substantial amount of light Serves as a standalone or companion window. Architectural shapes available.

DESCRIPTION

- (LMI/SMI) missile impact rated
- Design loads PVB Interlayer (+/-120) SG Interlayer (+/-140)
- Frame depth 3 1/8"
- Standard flush adaptor for installation
- Oversize reinforcement 3.75"
- Concealed mullion adapter (Not clip required)
- Stainless steel assembly screws to avoid future corrosion
- High performance low-e coating
- Sea Turtle Protection Code glass available
- Privacy glass available

- Shapes or arches on all figures
- Designed for narrow spaces
- Amazing water intrusion performances
- Glass heat strengthened standard
- Aluminum material is chemically pre-treated

• Laminated 7/16" H.S. • Laminated 9/16" H.S. • Insulated 1/16" H.S.

GLASS INTERLAYER

- PVB
- SGP

MAXIMUM QUALIFIED SQFT

- Min Width: 8"
- Max Width: 128"
- Min Height: 8"
- Max Height: 128"

MAX QUALIFY SIZE

- 50 x 120"
- MAX SQFT
- 41.7"







noise reduction



Serie **EC 200** Single Hung

Enhance a traditional design without sacrificing, with a stationary top window and a well-balanced bottom sash, this impact resistant single hung window will provide years of near-effortless operation. Ideal for narrow spaces where accesibility and airflow is necessary.

I

DESCRIPTION

- (LMI/SMI) missile impact rated
- Design loads PVB Interlayer (+/-120) SG Interlayer (+/-140)
- Frame depth 3 1/8"
- Standard sill 3.75"
- Oversize reinforcement 3.75"
- Concealed mullion adapter (Not clip required)
- Stainless steel assembly screws to avoid future corrosion
- Screws installed outside the frame
- Available Equal lites and Oriel
- High performance low-e coating
- Sea Turtle Protection Code glass available
- Privacy glass available

- Design for residential and high-rise applications
- Amazing water intrusion performances
- Aluminun cover for installed screws
- Flange frame for masonry and equal leg available
- Glass heat strengthened standard
- Aluminun material is chemically pre-treated

• Laminated 7/16" H.S. • Laminated 9/16" H.S. • Insulated 1/16" H.S.

GLASS INTERLAYER

- PVB
- SGP

MAXIMUM QUALIFIED SQFT

- Min Width: 14"
- Max Width: 53"
- Min Height: 24"
- Max Height: 120"



() noise reduction



 $-\dot{(uv)}$ - uv protection - $\dot{4}$ - energy saving



Serie EC 300 prizontal Slider

Deliver's deeper level of safety and security horizontal roller, is an excellent choice for wide horizontal openings. The narrow sightings allow for large expanses of glass that will flood your favorite spaces with light and strengthen connections to the outdoors. With thick aluminun frames and impact rated glass, which provide uncompromising protection from flying debris and hurricane force winds.

DESCRIPTION

- (LMI/SMI) missile impact rated
- Design loads PVB Interlayer (+/-120) SG Interlayer (+/-140)
- Frame depth 3 1/8"
- Oversize reinforcement 3.75
- Concealed mullion adapter (Not clip required)
- Stainless steel assembly screws to avoid future corrosion
- Screws installed outside the frame
- High performance low-e coating
- Sea Turtle Protection Code glass available
- Privacy glass available

- Polyamide rollers with nylon housing
- Stupendous water intrusion performances
- Aluminun cover for installed screw feature
- Designed for multiple laminated and insulated glass
- Glass heat strengthened standard
- Aluminun material is chemically pre-treated

• Laminated 7/16" H.S. • Laminated 9/16" H.S. • Insulated 1/16" H.S.

• PVB

• SGP

MAXIMUM QUALIFIED SQFT

- Min Width: 14"
- Max Width: 53"
- Min Height: 24"
- Max Height: 120"

MAX SQFT

• 42.2"



 (\overrightarrow{p}) noise reduction

Serie EC 500 Storefro

Visual appeal keeping in mind functionality, aesthetics, our aluminun storefront and glass systems have been tested to meet all your storefront specification. Our aluminun storefronts that bring elegance to commercial space allowing expansive views with our glass paneled wall designs, our framing systems are sure to make a great first impression.

DESCRIPTION

- (LMI/SMI) missile impact rated
- Design loads PVB Interlayer (+/-120) SG Interlayer (+/-140)
- Storefront panels are automically factory glazed
- Pre-assembled and Pre-glazed
- Concealed mullion adapter (Not clip required)
- Stainless steel assembly screws to avoid future
- High performance low-e coating
- Sea Turtle Protection Code glass available

- Compatible with series 600 impact door
- Anchors are not visible
- Glass heat strengthened standard
- Aluminun material is chemically pre-treated
- Front glazing design


MAXIMUM QUALIFIED SQFT

- Min Width: 12" • Max Width: 144"
- Min Height: 12"
- Max Height: 144"

• 60.00"







 $\dot{-(uv)}$ - uv protection $\dot{-(4v)}$ - energy saving

 $(f_{\mathcal{A}})$ noise reduction

16





Serie EC 120 Sliding Glass Door

Sliding glass door combines attractive design with functionality to further expand your indoor to outdoor space providing uninterrupted views and a great source of natural light while maintaning an impact rating for inclement weather areas.

DESCRIPTION

- (LMI/SMI) missile impact rated
- Design loads PVB Interlayer (+/-80) SG Interlayer (+/-80)
- Stainless steel assembly screws to avoid future corrosion
- High performance low-e coating
- Privacy glass available
- Frame depth 4 3/8"

BENEFITS

- Reinforced astragal above 9' 0"
- Raised grid for design freedom available
- Hidden drainages for unique appearance
- Glass heat strengthened standard

GLASS TYPE

• Laminated 7/16" H.S. • Laminated 9/16" H.S. • Insulated 1/16" H.S.

GLASS INTERLAYER

• PVB • SGP

• Adjustable tandem polyamide needle bearing rollers

MAXIMUM QUALIFIED SQFT

- Min Width: 60"
- Max Width: 96"
- Min Height: 50"
- Max Height: 96"

• 64.00"











noise reduction



Serie EC 180 Sliding Glass Door

With a robust design that coordinates perfectly with contemporary architecture. EC 180 is a heavy duty sliding glass door that brings perfect combination of acoustics and aesthetics. Designed standar low threshold that meets ADA standars and provides water infiltration protection. While being effortless to operate.

DESCRIPTION

- (LMI/SMI) missile impact rated
- Design loads PVB Interlayer (+/-120) SG Interlayer (+/-140)
- Robust SGD with anchorless jambs
- Frame depht 7"
- Available only SGP (+/-140 PSF)
- Stainless steel assembly screws to avoid future corrosion
- High performance low-e coating
- Sea Turtle Protection Code glass available • Privacy glass available

BENEFITS

- Reinforced astragal above 10' 0"
- Raised grid for design freedom available
- Hidden drainages for unique appearance
- Glass heat strengthened standard
- Aluminun material is chemically pre-treated

GLASS TYPE

• Laminated 9/16" H.S. • Laminated 9/16" H.S. • Insulated 1-5/16" H.S.

GLASS INTERLAYER

• SGP

MAXIMUM QUALIFIED SQFT


- Min Width: 60"
- Max Width: 120"
- Min Height: 78"
- Max Height: 120"

MAX SQFT

• 100.00"







(noise reduction



Serie EC 600 Commercial French Door

Design options to meet a variety of architectural styles preference with ability to meet ADA standars code. Hi techprofile and rainforced material feature a higher design pressure, making them ideal for your new or existing construction.

DESCRIPTION

- (LMI/SMI) missile impact rated
- Design loads PVB Interlayer (+/-120)
- SG Interlayer (+/-140)
- Frame depht 5"
- 1 1/4" 2["] Threshold option
- Bottom rail 4.5" 8" symmetric available
- High performance low-e coating

- Privacy glass available

- Quality and strength of heavy duty-gauge aluminun
- Reinforced entry resistant
- Glass heat strengthened standard
- Aluminun material is chemically pre-treated
- Front glazing design

GLASS TYPE

• Laminated 9/16" H.S. • Insulated 1-5/16" H.S.

• Sea Turtle Protection Code glass available

• Our is perfect for hotels, schools, office and buildings

- Min Width: 26"
- Max Width: 48"
- Min Height: 64"
- Max Height: 120"

MAX SQFT

• 40.00"





insurance



(
noise reduction





Serie EC 650 French Door

Build with elegance and versatility a high quality commercial grade aluminun alloy and intruder resistant laminated glass french door, this product unlike wood or steel, our doors won't warp or rust. This product is ideal for all entry door as an aeshtetically impressive entrance with high functionality and or passage door to connect your indoor and outdoor living spaces.

- (LMI/SMI) missile impact rated
- Design loads PVB Interlayer (+/-120) SG Interlayer (+/-140)
- Robust SGD with anchorless jambs
- Frame depht 5"
- Out-swing motion
- 1 1/14" 2" Threshold option
- Bottom rail 4.5" 8" symmetric available
- Stainless steel assembly screws to avoid future corrosion
- High performance low-e coating
- Sea Turtle Protection Code glass available
- Privacy glass available

- Optional raised grid with high design
- Self mating sidelites
- Three-point lock, heavy-duty hinges, lever, handles deadbolts
- Design options to meet a variety of styles and preferences
- Glass heat strengthened standard
- Aluminun material is chemically pre-treated
- Front glazing design

GLASS TYPE

- Laminated 7/16" H.S.
- Laminated 9/16" H.S.
- Insulated 1/16" H.S.

- PVB
- SGP

MAXIMUM QUALIFIED SQFT

- Min Width: 48"
- Max Width: 96"
- Min Height: 72"
- Max Height: 120"

• 40.00"



insurance



() noise reduction





MAXIMUM QUALIFIED SQFT

MAX SQFT

• 41.60"

Architectural **SHAPES** Available



ARCH TOP FIXED

• Min Width: 36" • Max Width: 216" • Min Height: 12" • Max Height: 144"

ARCH FIXED

MAXIMUM QUALIFIED SQFT

- Min Width: 20"
- Max Width: 100"
- Min Height: 14"
- Max Height: 128"

MAX SQFT

• 41.66"



HALF ARCH FIXED LEFT / HALF ARCH FIXED RIGHT


MAXIMUM QUALIFIED SQFT

- Min Width: 18"
- Max Width: 100"
- Min Height: 24"
- Max Height: 128"

MAX SQFT

• 41.66"





CIRCLE FIXED

MAXIMUM QUALIFIED SQFT

- Min Width: 20"
- Max Width: 76.5"
- Min Height: 20"
- Max Height: 76.5"

MAX SQFT

• 41.66"

TRAPEZOID LEFT / TRAPEZOID RIGHT

MAXIMUM QUALIFIED SQFT

MAX SQFT

• 41.66"



• Min Width: 18" • Max Width: 128" • Min Height: 24" • Max Height: 128"



TOMBSTONE FIXED

MAXIMUM QUALIFIED SQFT

- Min Width: 20"
- Max Width: 76.5"
- Min Height: 20"
- Max Height: 76.5"

MAX SQFT

• 41.66"





HALF TOMBSTONE FIXED LEFT / HALF TOMBSTONE FIXED RIGHT

MAXIMUM QUALIFIED SQFT

- Min Width: 18"
- Max Width: 70"
- Min Height: 24"
- Max Height: 128"

HALF CIRCLE FIXED

MAXIMUM QUALIFIED SQFT

- Min Width: 24"
- Max Width: 80"
- Min Height: 12"
- Max Height: 40"

Our products also deliver UV protection by filtering out 99% of harmful UV rays, and have the capabilities to reduce outside outside noise up to 34%

DESCRIPTION


- Concealed HOR, AWD vent mullion
- Florida Approval installed with-out-clipReinforce for large sizes
- Depth 3"
- Maximum lenght 120"

BENEFITS

- Aluminun alloy does not rot, warp or rust
- Built weather tough conditions
- Strong frame design
- No chip required



Window MULLION Aluminun

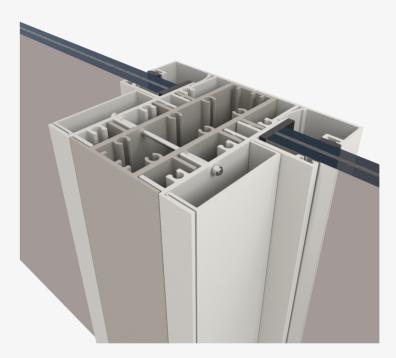





CLEAR



GRAY



Standard **FINISHES**

AZURE BLUE

AVAILABLE GLASS COLORS

AVAILABLE FRAME COLORS




Our FACILITIES



We are committed to demonstrated mutual respect and appreciation to all our employees no matter what race, color, culture, gender, sexual orientation, religion, education, ethnicity, age, language, so that each employee can achieved his or her potential and we exceed our customer's expectations.




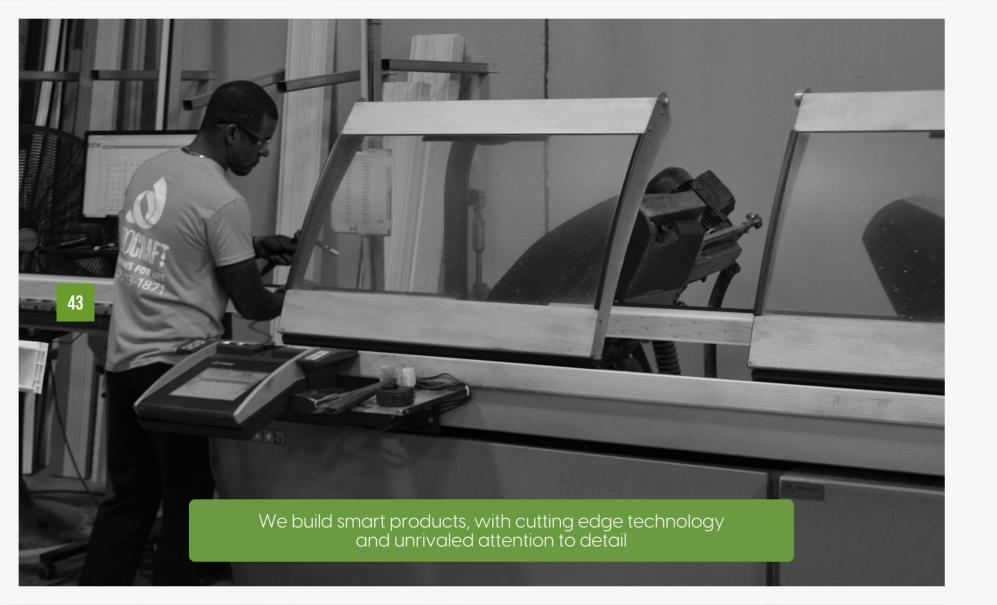





All of our window and door systems have been designed with security in mind and we´ve built an unmatched global reputation

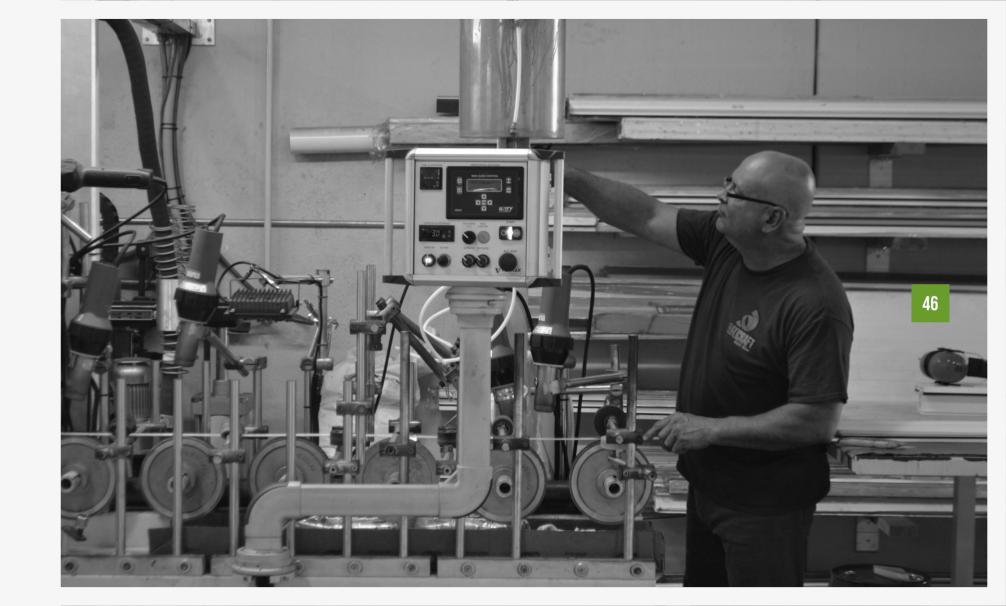



Yuxmiell Mujica



Yuxmiell Mujica is **a** charismatic, driven United States business owner based in Miami, FL. Founder and President of Eurocraft Industries. Ocean Doors and Windows /dba / Mujica's Railing and Fence, as well as Mujica**'s** Powder Coating..

Yuxmiell is a Cuban born immigrant who built his reputation and performance by satisfying and supporting the need of each individual client with absolute courtesy and expertise.

For over 16 years Yuxmiell has been a noteworthy leader in the Impact Windows and Doors and Powder Coating space. You may know him from his work centered around the manufacturing and distribution of construction, such as, impact windows, doors, storefronts and aluminum fixtures. Catering both commercial and residential products. His passion is to provide the highest quality services, offering the best available product.